


Reconditioned Magnum

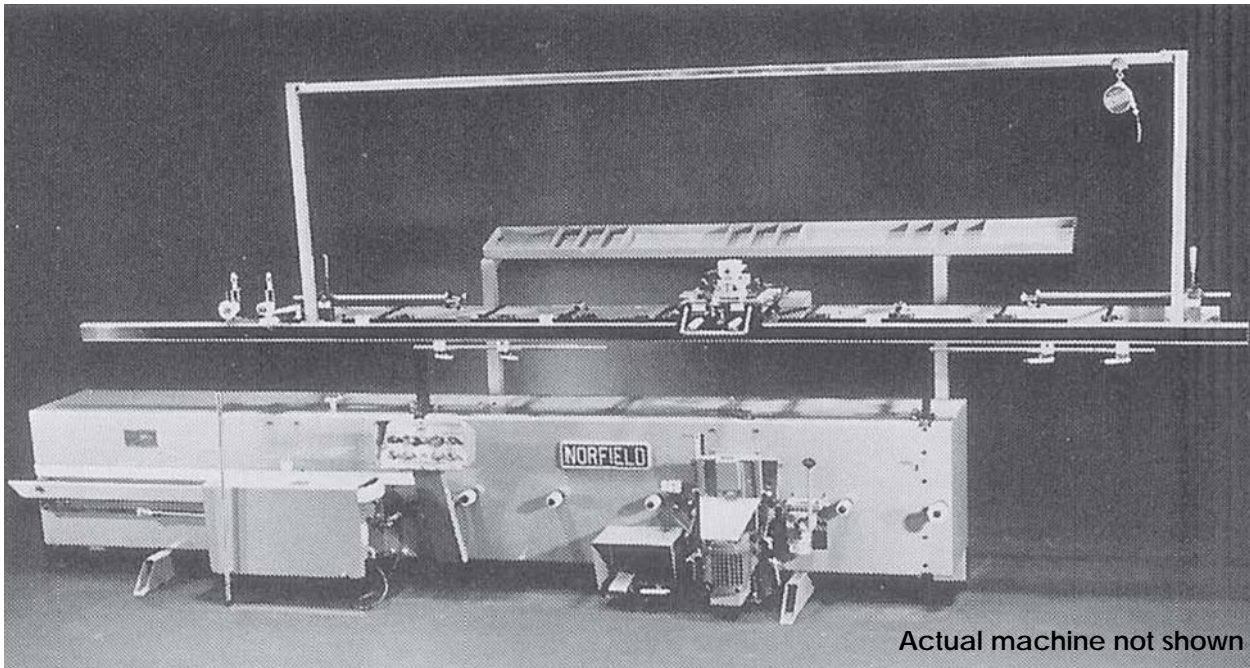

The Magnum, a long-time standard in the industry, combines the speed and versatility necessary to process interior and exterior doors and jambs.

All service and reconditioning is performed by a Norfield factory trained service technician with Norfield OEM replacement parts. As needed all parts will be replaced if deemed worn, damaged, or not to original operating specifications.

The reconditioned Magnum includes:

Electrical

- All electrical controls and switches checked and replaced as needed
- All wiring is checked and replaced as needed
- Upgraded router assemblies with new DeWalt DW616 router motors

Guards

- Cutterhead/sander rear guard checked and replaced as needed
- Cutterhead/powerfeed front guard check and replaced as needed
- Latch drill belt guard checked and replaced as needed

Pneumatic

- Latch drill cylinders replaced
- All cylinders checked and replaced as needed
- All valves checked and replaced as needed
- Repair any airleaks and damaged airlines are replaced

Mechanical

- Powerfeed wheels replaced
- Door rollers replaced (except for steel rollers)
- Double v-belts replaced
- Latch drill timing belts replaced
- Cutterhead belts replaced
- All bits replaced
- All sander wheels replaced
- All wear strips replaced
- Cutterhead and drill mandrels checked and replaced as needed
- All bearings checked and replaced as needed



Machinery Sales and Service

(214) 559-3460

www.MachinerySalesandService.com

Reconditioned Magnum

Capabilities

Doors	Min	Max
• Width	1' 6"	4' 0"
• Height	6' 6"	8' 0"
• Thickness	1-1/8"	1-3/4"

Jams	Min	Max
• Width	3-1/2"	10-1/2"
• Height		8' 0"
• Thickness	1/2"	1-5/8"

Hinge, Lock and Latch	Min	Max
• Butt sizes	3-1/2" x 3-1/2"	5" x 5"
• Butt spacing	Infinitely variable	
• Butt radius	1/4" & 5/8"	
• Lock backsets	2-3/8" to 5"	
• Faceplate routing	Up to 1-1/8" x 2-3/4"	

Specifications

• Length	16' 8"
• Width	3' 0"
• Height	8' 6"
• Minimum floor space required	5' x 18'
• Electrical	230V 3_ 60Hz. 50 Amps and 230V 1_ 60Hz. 30 Amps STD
• Air	2.2 CFM @ 90 psi 8.5 CFM @ 90 psi with optional air screwdriver
• Approx. shipping weight	2600 lbs.



Machinery Sales and Service

(214) 559-3460

www.MachinerySalesandService.com